






High power capacity and high sensitivity.

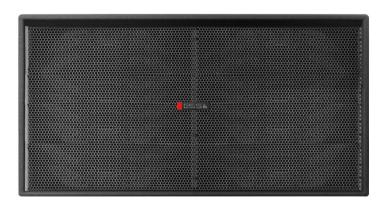

## **Technical Specifications:**

· ·	
Technical Parameters	WA218S
Components	2x18" 100mm voice coil LF driver
Recommended Amplifier	4000W
Nominal Impedance	4Ω
Frequency Response	30Hz-200Hz
Sensitivity (1W/1M)	104dB
Max. SPL (1M) *	135dB
Connectors	2×Neutrik NL-4; ±1
Installation manner	Flying or ground stacking (ground-stack frame needed, or
	stacking on the subwoofer))
Dimension (H×W×D)	561mm × 1066mm × 780mm
Weight	89Kg