




PS875

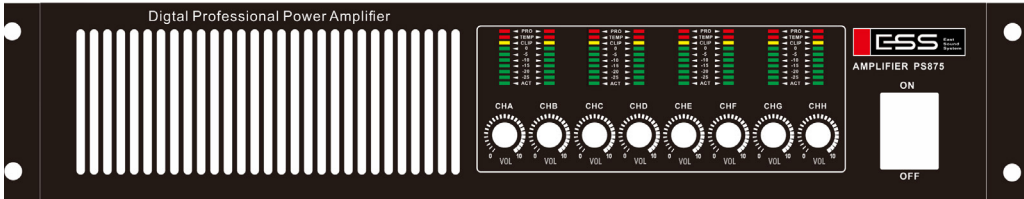

Technical Specifications:

Input/Output	Output Power		8Ω 8 x 400W
			4Ω 8 x 750W
	Input Connectors		XLR Female
	Output Connectors		Speakon
	Sensitivity(dB)		21dB, 26dB, 32dB, 41dB
Nominal Parameters	Power Supply		AC 110-220V ~ 50Hz
	Input Impedance	Balanced	20KΩ
		Unbalanced	10KΩ
	Frequency Response		20Hz-20kHz (+0/-1dB)
	THD		<0.08%
	S/N Ratio (dB)		109dB
	Conversion Rate		50v/μs
	Damping Factor		>280
Dimension & Weight	Weight		9kg
	Dimension (WxHxD)		483x88x420mm
Protect	Short-circuit Protect, Overload Protect, Overheat Protect		